


GDX/GDS Pre-Filter Wrap

Description

GDX/GDS pre-filter wraps add an additional stage of filtration and extend the service life of the primary/final filter. These medium efficiency polyester pre-filters are designed to capture large particles, airborne fibers, seeds, insects, etc., before they reach the final filter. The single piece design allows for easy installation and change out during operation.

GDX/GDS pre-filter wraps are comprised of 100% non-shedding, gradient density poly-propylene fibers which makes them ideal for wet/high-moisture environments. Helps improve the performance of the final filter by coalescing water droplets and draining them away.

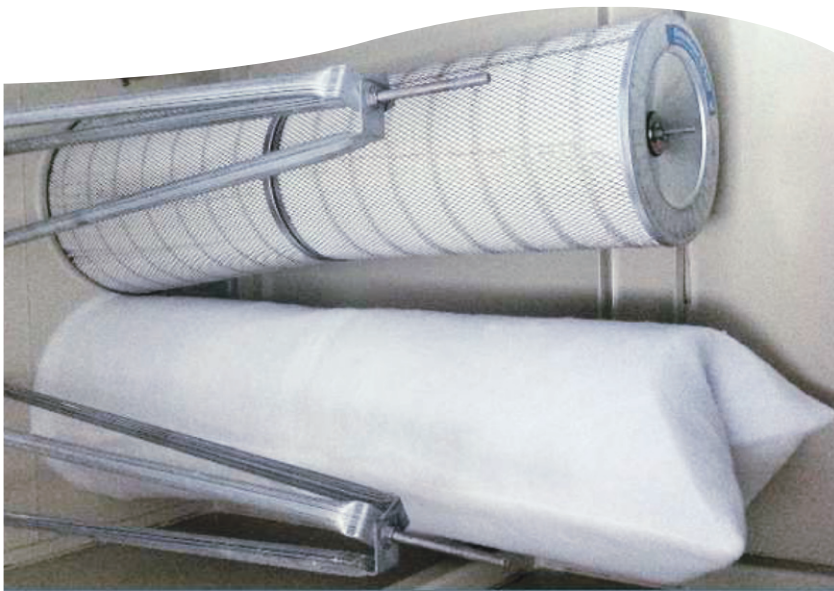

Single piece design of GDX/GDS cartridge wrap allows for easy installation and change out during operation. For use with any GDX/GDS conical, cylindrical cartridge/canister filter



** Optional installation tool available*

Features	Benefits
Easy to install*	Extends the life of the final filter
Low initial pressure drop	Minimal effects on system delta P
Excellent water coalescence	Minimize spikes in pressure drop during fog/rain events
Ideal for wet/high-moisture environments	




For your nearest dealer call:
1.800.796.4EFS (4337)
EngineeredFiltrationSystems.com

GDX/GDS Pre.Filter Wrap

GDX/GDS pre-filter wraps are designed to extend the life of your air intake filters. The single-piece design facilitates for change out during operation.

CFM	Inches w.g.
295	.008"
600	.014"
890	.020"
1180	.030"
1400	.050"
1780	.065"

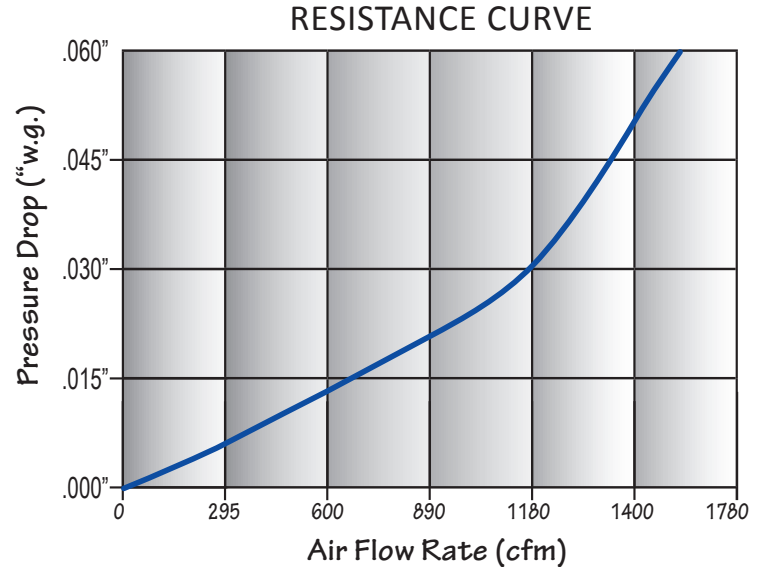

Application Parameters

ASHRAE 52.2 Rating @ 2000 cfm	Available in G4/MERV 6 - MERV 138
Relative Humidity	100%
Media Surface Area	8.67 - 9.80 ft ² (0.8 - 0.91 m ²)
Initial Pressure Drop	0.050" wc at 1472 cfm
Sizes	Available for all GT cartridge sizes
Designed for	Standard GDS/GDX conical and cylindrical filter parts
Outer Layer Media	Single layer, medium efficiency coalescing, high-loft synthetic media
Inner Layer Media	Multi-layer, higher efficiency coalescing synthetic media
Installation	Use of telescopic installation tool allows for changeout during operation; no need to remove final filters to install pre-filters.

Part Number	Length	Donaldson Equiv.	For Use with Filter
F-SOCK-GDX	52"	P03-9131 & P03-9132	GDS/GDX conical and cylindrical filters**

For use with Donaldson (P19* series) GDS-II, GDS-I, GDX, AAF (DuraShield, HydroKlean & DuraKlean), Camfil Farr (CamPulse EF, CY-2612/CO-2612), EFS (GDX), GE (Altair), Pneumafil (Matrex, Pneuma-Pulse, etc.), TDC (BX, SX, QX, TW, CX, etc.), TVS (various), Viledon (TFP90), and equivalent brands cartridge/canister filters.

* Part numbers: P19 series (P19-1961, P19-1962, P19-1177, P19-1178, P19-1280, P19-1281, etc.)



For your nearest dealer call:
1.800.796.4EFS (4337)
EngineeredFiltrationSystems.com